


Pro-Lift Lubrication Guide

Use a good quality bike chain oil or motor oil. Apply oil lubricant to the Pro-Lift table as indicated in this guide and allow the oil some time to work its way into the joints. This may take a few days. Wipe off any excess oil.

Do not use thin oils or spray-on oil lubricants such as WD40, RP7 or CRC.

If this fails to eliminate table noise in a few days, repeat the process. If noise still persists, the table will require a pivot bush service (i.e. the removal of the pivot bolts and application of a heavy-bodied grease).



WARNING: Do not lubricate the telescopic hub of the motor. This self-lubricating mechanism may be permanently damaged if lubricated. If you are unsure about any of the information in this guide, please contact Athlegen Customer Service.

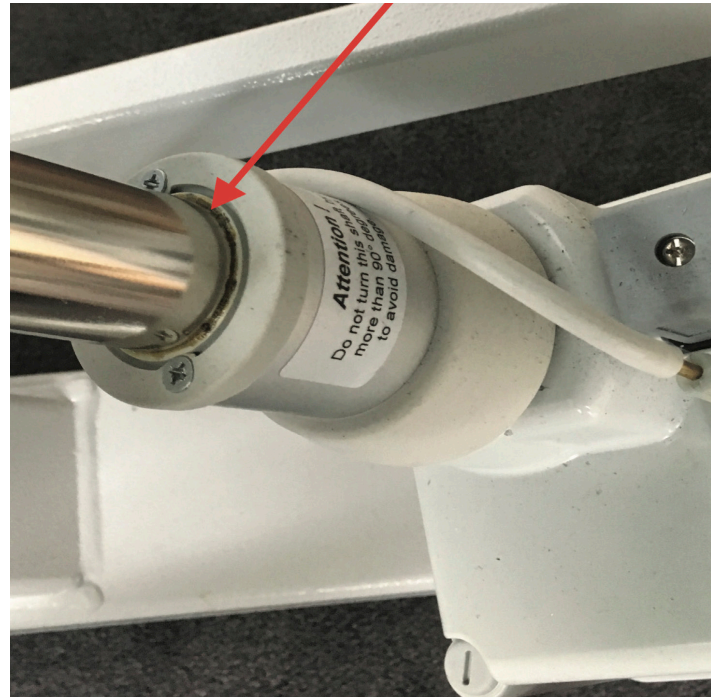

Lubricate both sides of the top motor mount



Lubricate both sides of the bottom motor mount

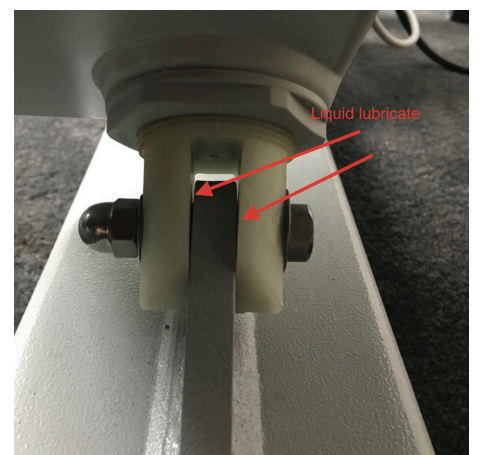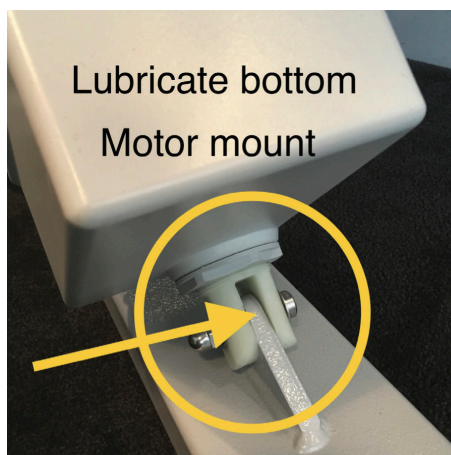





Side view: Liquid lubricate all eight pivot points



4 bottom pivots

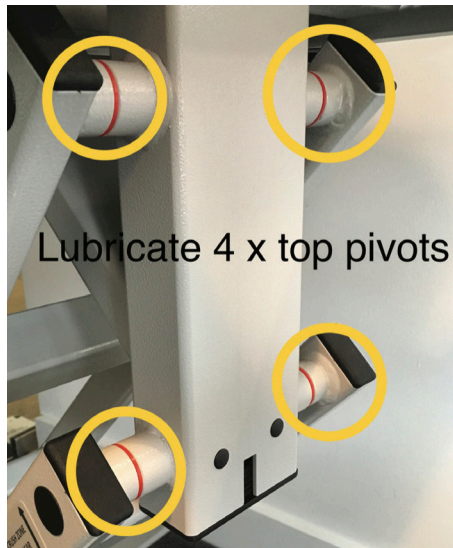

4 top pivots

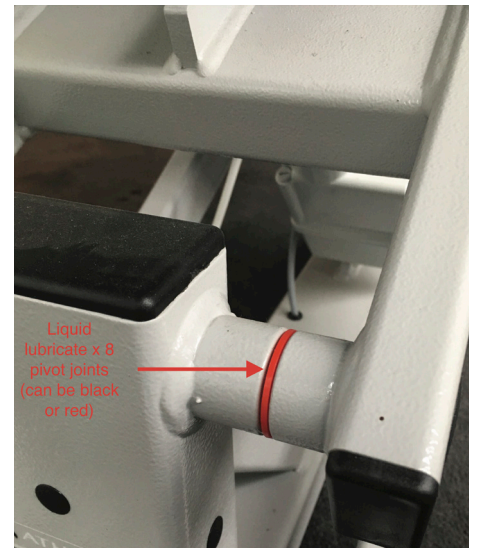

Apply liquid lubricant from the top of the pivot (pivot bushes may be black or red)